

Cable type

FLEXIFLAT 450/750 V

(N)GFLGÖU- J/ (N)GFLGÖU- JZ flat rubber cables for festoon system

Main application

Flexible power and control cables for use on connecting movable parts of machine tools and any material handling equipment. Suitable for power and signalling supply on festoon systems with fast movement with strong acceleration.

Construction

Conductor:	Plain or tinned copper conductor, flexible to IEC 60228 cl.6 up to 6 mm ² , cl. 5 from 10 mm ² Specially designed for mobile application
Insulation:	EPR compound better than 3GI3 Specially developed compound with improved electrical and mechanical characteristics
Cores identification:	Colours according to HD 308 S2 Standard colours: - 4 cores: green/yellow, brown, black, grey - ≥ 6 cores: black with printed numbers + green/yellow Green/yellow approximatly in the middle
Core arrangement:	Parallel, starting from 12 cores in parallel bundle Green/yellow approximatly in the middle of the cable
Separation (if any):	Tape(s)
Outer sheath:	Black polychloroprene rubber compound UV resistant, oil and chemical resistant better then 5GM2
Marking:	PALAZZO - FLEXIFLAT 450/750 V n. of cores x cross section

Parameters

Electrical	Rated voltage	U ₀ /U = 450/750 V
	Maximum permissible operating voltage in AC systems	U _m = 900 V
	AC test voltage over 5 minutes	2,5 kV
	Current Carrying Capacity	According to DIN VDE 0298 part 4
	Bus compatibility	Cable with twisted and individually shielded pairs can be used for bus systems
Thermal	Fully flexible operation	- 25 °C
	Fixed installation	- 40 °C
	Maximum permissible operating temperature of the conductor	90 °C
	Short-circuit temperature of the conductor	250 °C
Mechanical	Tensile load	Up to 15 N/mm ²
	Minimum bending radii	According to DIN VDE 0298 part 3
	Reeling operation	NO APPLICATION
	Festoon systems	Up to 180 m/min
Chemical	Resistance to oil	According to VDE / IEC standard
	Weather resistance	Unrestricted use outdoor and indoor, UV resistant, moisture resistant.

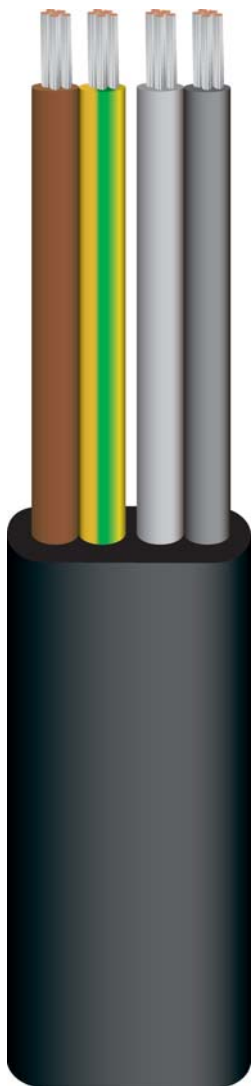


Table 1: FLEXIFLAT 0.6/1 kV (N)GFLGÖU-JZ

N. of cores and nominal cross section (n-mm ²)	Nominal conductor diameter (mm ²)	Max. D. C. electr. res. at 20 °C (Ohm/km)	Nominal overall dimensions WixTh (mm)	Weight for 1000 m (kg/km)	Max. permissible tensile load (N)
4 x 1.5	1.5	13.7	6 x 17,5	200	90
7 x 1.5	1.5	13.7	6 x 27,5	330	158
3 x 4 x 1.5	1.5	13.7	15 x 35	810	270
4 x 4 x 1.5	1.5	13.7	15 x 45	1055	360
4 x 2.5	2.0	8.21	7,3 x 21	300	150
3 x 4 x 2.5	2.0	8.21	17 x 41	1125	450
4 x 4 x 2.5	2.0	8.21	17 x 53	1465	600
4 x 4	2.4	5.09	8,7 x 25,5	445	240
4 x 6	3.1	3.39	9,4 x 29	575	360
4 x 10	4.2	1.95	11 x 35	870	600
4 x 16	5.4	1.24	13 x 41	1250	960
4 x 25	6.7	0.795	14,9 x 48	1785	1500
4 x 35	8.2	0.565	16,8 x 52	2330	2100
4 x 50	9.6	0.393	19,5 x 61	3200	3000
4 x 70	11.6	0.277	22 x 70	4280	4200
4 x 95	13.2	0.210	24 x 79	5550	5700

with integrated fibre-optics on request